

SHOWPRO

ELECTRIC CHAIN MOTOR

CAPACITIES

1/2, 1 & 2 Tonne
500, 1000 & 2000 Kgs.

LIFT

66 feet
20 meters

SPEEDS

16 feet/minute at 60Hz
4.1 meters/minute at 50Hz

The ShowPro electric chain hoist is designed to meet all basic entertainment rigging needs. Low Voltage Control and Direct Control available. Direct Control hoists offer an optional control cable fitted with IEC style connectors, 4-way hoist controller and chain bag for a complete plug and play system.

BENEFITS & FEATURES

VERSATILE

Operates on a wide range of 3-phase voltages.

LIGHTWEIGHT

Aluminum housing.

EFFICIENT

Engineered for smooth, quiet operation;

FEATURING A 5-POCKET LIFT WHEEL.


RELIABLE

OVERLOAD CLUTCH

Protects hoist, operator, structure from damaging overloads.

LIFETIME WARRANTY

Against defective materials and workmanship.

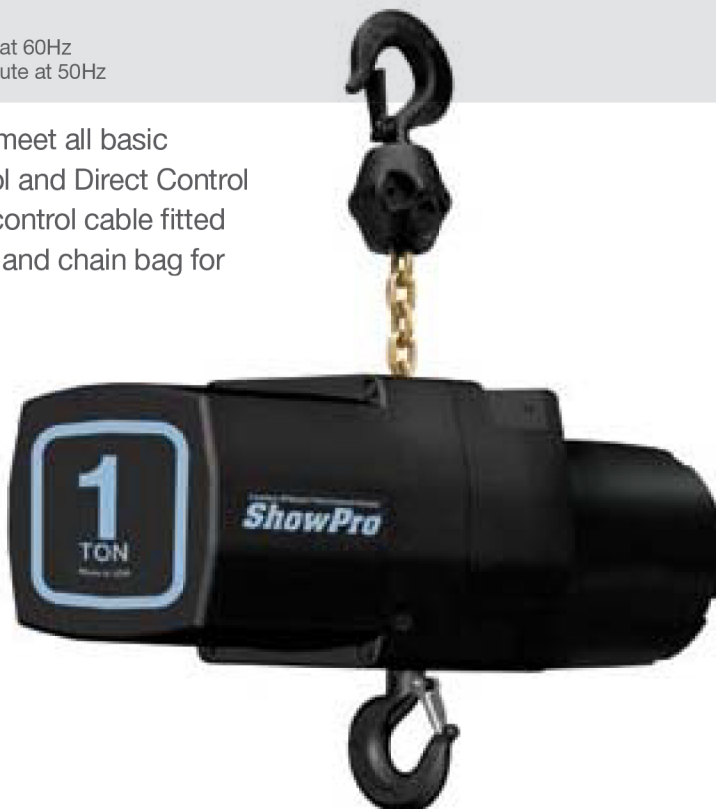

SPECIFICATIONS

Model	Capacity (Tonne)	Number of Chains	Lift (Feet)	Lifting Speed (FPM)	Motor HP	Motor Voltage/Phase/ Hertz	Amps	Motor Voltage/Phase/ Hertz	Amps	APX. Ship Wt. W/ 66 ft. Lift (lbs.)
SP1003	1/2	1	66	16	1/2	230/3/60	2	460/3/60	1	119
SP2003	1	1	66	16	1	230/3/60	3.2	460/3/60	1.6	126
SP4003	2	2	66	8	1	230/3/60	3.2	460/3/60	1.6	186

Standard operational 3-phase voltages — 208, 230, 380, 415, 460 @ 50 or 60 Hertz

DIMENSIONS

Model	Capacity		Chain Size		Housing Dimensions (in.)		
	Tonne	Kg.	in.	mm	H	W	L
SP1003	1/2	500	9/32	7.1	8 11/16	8 11/16	24 3/8
SP2003	1	1000	9/32	7.1	8 11/16	8 11/16	24 3/8
SP4003	2	2000	9/32	7.1	8 11/16	8 11/16	24 3/8

XSF
xsftruss.com

CALL OR EMAIL US

1-903-438-1100

SALES@XSFTRUSS.COM

A certified distributor of Columbus McKinnon Entertainment Products